


英管外螺纹 60° 内锥或六角端面用

组合垫密封/公制外螺纹轻系列 ISO 6149-3

BSP MALE DOUBLE USE FOR 60° CONE SEAT

OR BONDED SEAL /METRIC MALE L-SERIES ISO 6149-3

1BH

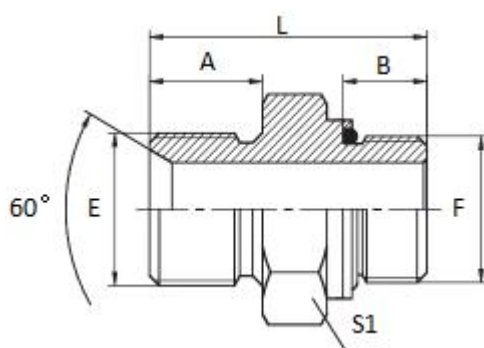

代号尺寸:

代号 PART NO.	螺 纹 THREAD		O 形圈 F 端 O-RING F 端	尺 寸 DIMENSIONS			
	E	F		A	B	S1	L
1BH-02-10NZ	G1/8"X28	M10X1	O08.1X1.6	10	8.5	14	25
1BH-02-12NZ	G1/8"X28	M12X1.5	O09.3X2.2	10	11	17	29.5
1BH-04-12NZ	G1/4"X19	M12X1.5	O09.3X2.2	12	11	19	30
1BH-04-14NZ	G1/4"X19	M14X1.5	O11.3X2.2	12	11	19	31.5
1BH-04-16NZ	G1/4"X19	M16X1.5	O13.3X2.2	12	11.5	22	31.5
1BH-06-14NZ	G3/8"X19	M14X1.5	O11.3X2.2	13.5	11	22	35
1BH-06-16NZ	G3/8"X19	M16X1.5	O13.3X2.2	13.5	11.5	22	33
1BH-06-18NZ	G3/8"X19	M18X1.5	O15.3X2.2	13.5	12.5	24	36.5
1BH-08-18NZ	G1/2"X14	M18X1.5	O15.3X2.2	16	12.5	27	41
1BH-08-22NZ	G1/2"X14	M22X1.5	O19.3X2.2	16	13	27	41.5
1BH-10-22NZ	G5/8"X14	M22X1.5	O19.3X2.2	17.5	13	30	43
1BH-12-16NZ	G3/4"X14	M16X1.5	O13.3X2.2	18.5	11.5	32	43.5
1BH-12-22NZ	G3/4"X14	M22X1.5	O19.3X2.2	18.5	13	32	45
1BH-12-27NZ	G3/4"X14	M27X2	O23.6X2.9	18.5	16	32	45.5
1BH-16-27NZ	G1"X11	M27X2	O23.6X2.9	20.5	16	41	52

1BH-16-33NZ	G1"X11	M33X2	O29.6X2.9	20.5	16	41	49.5
1BH-20-42NZ	G1.1/4"X11	M42X2	O38.6X2.9	20.5	16	50	51.5
1BH-24-48NZ	G1.1/2"X11	M48X2	O44.6X2.9	23	17.5	55	55.5

注: F 螺纹端与 ISO 6149-1 油口匹配使用。 Note: F thread end fit with ISO 6149-1 port.